# LED FRESNEL W/W HD DMX ZOOM

## LEDFRE115



Generation 2 of the successful LED Fresnel WW with DMX Zoom
The HD model delivers 50% more output which can truly outperform traditional 1200w fixtures.
Ultra-Smooth dimming and silent motorised zoom provides flexibility for a wide range of applications.

### **FEATURES**

- Flawless 16 bit dimming
- DMX controlled Zoom for easy focusing and adjustment
- Multiple control modes
- Selection of four dimming curves
- Flicker-free output with selectable PWM frequencies for worry-free video
- Standalone control with last setting recall on power cycle

#### **SPECIFICATIONS**


LED Fresnel W/W HD DMX Zoom	Product Code:	LEDFRE115
COB LED	Beam Angle:	15°-60°
4000 LUX @ 5 Meters	Focus:	Variable via DMX
0-20 Hz	Dimming:	4 dimming curve modes
DMX RDM	DMX Channels:	1/2/3
Yes	Display	LED
180 W	Supply Voltage	100 - 240 v
Neutrik PowerCon In/Out	Data Connections:	5 & 3 pin XLR In/Out for DMX
Diecast	Finish:	Power Coated Matt Black
IP20	Cooling:	Variable
0-45 deg C	Approval	C-tick
6.6kg	Dimensions	417x286x260mm
>90		
	COB LED  4000 LUX @ 5 Meters  0-20 Hz  DMX RDM  Yes  180 W  Neutrik PowerCon In/Out  Diecast  IP20  0-45 deg C  6.6kg	COB LED  Beam Angle:  4000 LUX @ 5 Meters  O-20 Hz  Dimming:  DMX RDM  DMX Channels:  Yes  Display  180 W  Supply Voltage  Neutrik PowerCon In/Out  Diecast  IP20  Cooling:  0-45 deg C  6.6kg  Dimensions






# LED FRESNEL W/W HD DMX ZOOM

## **Photometrics**

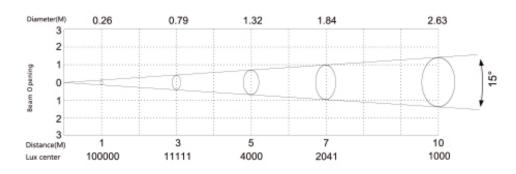

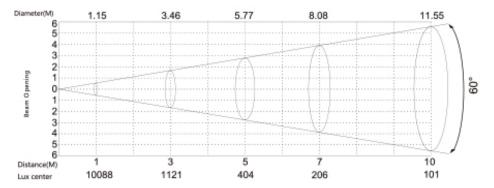

## **Dimensions**







## Accessories

LEDFRE111 Barndoor

Show Pro DMX Cable 1.5m 5pin / powerCON Combo PSHDMX400 PSHDMX401 Show Pro DMX Cable 3m 5pin / powerCON Combo


KUPRIG071 Mini Coupler with T-Handle Black

SYDNEY

+61 2 9748 1122

**KUPRIG110** Large Safety Wire (10Kg SWL)





**MELBOURNE** 

