

# LED FRESNEL W/W HD MANUAL ZOOM

## LEDFRE105



Generation 2 of our most popular manual zoom LED Fresnel, has been enhanced to achieve higher output than a conventional 1000w tungsten Fresnel. Improved optics and a larger zoom range increases flexibility and versatility no matter your application.


- Flawless 16 bit dimming
- Selection of four dimming curves
- Flicker-free output
- Standalone control with last setting recall on power cycle
- Compact footprint
- Low Power consumption

## SPECIFICATIONS


<b>Product:</b>	LED Fresnel W/W HD Manual Zoom	<b>Product Code:</b>	LEDFRE105
<b>Light Source:</b>	COB LED	<b>Beam Angle:</b>	10°-60°
<b>Output:</b>	2100 LUX @ 5 Meters	<b>Focus:</b>	Variable
<b>Strobe:</b>	0-20 Hz	<b>Dimming:</b>	4 dimming curve modes
<b>Control:</b>	DMX	<b>DMX Channels:</b>	1 / 2 / 3
<b>Stand Alone Control</b>	Yes	<b>Display</b>	LED
<b>Power Consumption max</b>	105 W	<b>Supply Voltage</b>	100 - 240 v
<b>Power Connections:</b>	Neutrik PowerCon In/Out	<b>Data Connections:</b>	5 & 3 pin XLR In/Out for DMX
<b>Housing:</b>	Diecast	<b>Finish:</b>	Power Coated Matt Black
<b>IP Rating:</b>	IP20	<b>Cooling:</b>	Variable
<b>Operating Temperature:</b>	0-45 deg C	<b>Approval</b>	C-tick
<b>Weight</b>	6.1kg	<b>Dimensions</b>	326(L) X 281(W) X 323 (H) mm
<b>CRI 3200K</b>	>90		

# LED FRESNEL W/W HD MANUAL ZOOM

## Photometrics

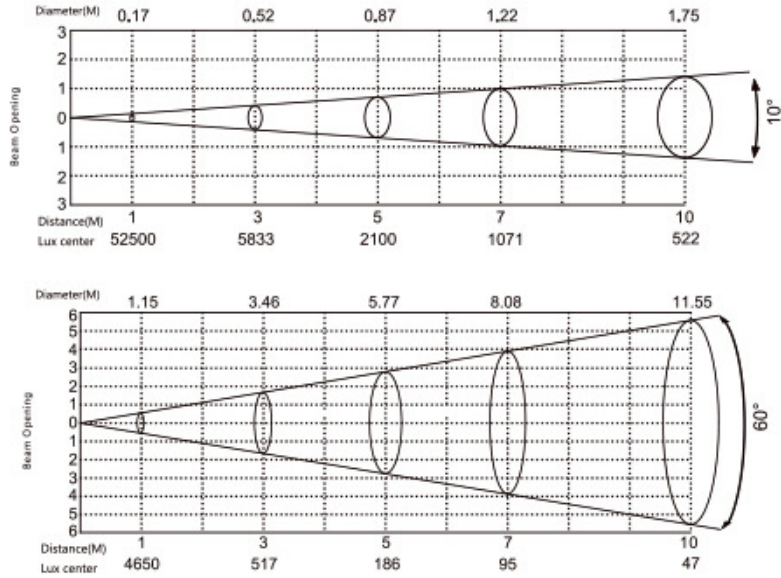

## Dimensions

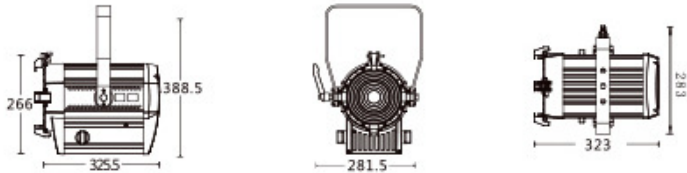

## Optional Accessories

- LEDFRE101** Barndoor
- PSHDMX400** Show Pro DMX Cable 1.5m 5pin / powerCON Combo
- PSHDMX401** Show Pro DMX Cable 3m 5pin / powerCON Combo
- KUPRIG071** Mini Coupler with T-Handle Black
- KUPRIG110** Large Safety Wire (10Kg SWL)